

GVP SERIES

GVP 220

GENPOWER[®]

GENERATOR

231/400V - 50Hz



Features and Benefits

- Half Century Experience in Generator Manufacturing
- Diesel Engines with Advanced Technology and Quality
- Alternators with Advanced Technology and Quality
- Control Panel Suitable for Flexible Application
- High Quality and Reliable Technology
- Patented Compact Designed and Soundproof Canopy
- Suitable for Heavy-Duty
- Durability
- Wide Range of Affordable Spare Parts
- Low Noise Level
- Low Exhaust Emission
- Low Operating Cost
- Low Fuel Consumption
- Low Oil Consumption
- Tropical 50°C Radiator
- Fuel Filter with Water and Particle Separator
- First Class Product Support
- Global Technical Service and Maintenance Support

Generator General Information

| Generator | Frequency | Voltage | Power Factor | Speed | Diesel Engine | | Alternator | | | Type of | Generator Output | | |
|----------------|-----------|---------|--------------|-------|--------------------|-------------------|-----------------|------------|-------------------|---------------------------------|-------------------------|-------------------------|-------------------------|
| Model | Hz | V | CosQ | rpm | Brand | Model | Brand | Model | Series | Operation | kVA | kW | A |
| GVP 220 | 50 | 231/400 | 0,8 | 1500 | VOLVO PENTA | TAD 733 GE | GENPOWER | GNP | GNP 270 M1 | Stand By Prime Continuous | 220,0 200,0 140,0 | 176,0 160,0 112,0 | 317,9 289,0 202,3 |

VOLVO PENTA Diesel Engine Technical Parameters and Matching Parameters

Diesel Engine Main Technical Parameters

General

| | | |
|---------------------|----|---------------------|
| Number of Cylinders | | 6 |
| Configuration | | Vertical, in line |
| Aspiration | | Turbo Charged & CAC |
| Combustion System | | Direct injection |
| Compression Ratio | | 18:1 |
| Bore | mm | 108 |
| Stroke | mm | 130 |
| Displacement | L | 7,15 |
| Governing Type | | Electronic |
| Governing Class | | G3 |
| Rotation | | Counterclockwise |
| Firing Order | | 1-5-3-6-2-4 |
| Emission | | EU Stage 2 |

Filters

| | | |
|-------------|--|--------------------------------|
| Air Filter | | Dry Type, replaceable |
| Fuel Filter | | Element type, replaceable |
| Oil Filter | | Element type, particulate trap |

Electrical System

| | | |
|---------------------------|----|------|
| Voltage | V | 24 |
| Starter | kW | 5,5 |
| Alternator Output Ampers | A | 35 |
| Alternator Output Voltage | V | 28 |
| Batteries Capacity | Ah | 2X85 |

Fan

| | | |
|------------------|----|-----------|
| Diameter | mm | 770 |
| Drive Ratio | | 1:1 |
| Number of Blades | | 9 |
| Material | | Composite |
| Type | | Blowing |

Cooling System

| | | |
|--|-------------------|----------|
| Radiator Type | 50°C | Tropical |
| Total Coolant Capacity | L | 39 |
| Max. Perm. Coolant Outlet Temperature | °C | 105 |
| Max. Perm. Flow Resis. (Cool. System And Piping) | bar | 0,5 |
| Max. Temperature of Coolant Warning | °C | 98 |
| Max. Temperature of Coolant Shutdown | °C | 103 |
| Thermostat Operation Temperature - Initial Open | °C | 87 |
| Thermostat Operation Temperature - Full Open | °C | 102 |
| Delivery of Coolant Pump | m ³ /h | 3,00 |
| Min. Pressure Before Coolant Pump | bar | 0,25 |
| Radiator Face Area | m ² | 0,716 |
| Rows | Row | 2 |
| Matrix Density | Per / Inch | 12 |
| Material | | Aluminum |
| Width of Matrix | mm | 707 |
| Height of Matrix | mm | 10013 |
| Pressure Cap Setting | kPa | 90 |
| Estimated Cooling Air Flow Reserve | kPa | 0,125 |
| Engine Pre Heater Tube (with Circulation Pump) | W | 2000 |

Lubrication System

| | | |
|--|-----|------|
| Total System | L | 34 |
| Minimum Oil Level | L | 24 |
| Nominal Motor Operating Temperature | °C | 45 |
| Lubricating Oil Pressure (Rated Speed) | bar | 5,2 |
| Relief Valve Opens | kPa | 300 |
| Oil / Fuel Consumption Ratio | % | 0,08 |
| Normal Oil Temperature | °C | 110 |

Diesel Engine Matching Parameters

50 Hz @ 1500 r/min

| | | |
|--|----------------------|---------|
| Gross Engine Power | kW | 201,0 |
| Net Engine Power | kW | 195,0 |
| Fan Power Consumption (Belt Pulley Driven) | kW | 6,1 |
| Other Power Loss | kW | - |
| Mean Effective Pressure | MPa | 2200,00 |
| Intake Air Flow | m ³ / min | 12,40 |
| Exhaust Temperature Limit | °C | 530 |
| Exhaust Flow | m ³ / min | 37,20 |
| Boost Pressure Ratio | | 20,00 |
| Mean Piston Speed | m / s | 6,5 |
| Cooling Fan Air Flow | m ³ / min | 162,0 |
| Typical Generator Output Power | kVA | 225 |

Heat Rejection

| | | |
|---------------------------------------|----|-------|
| Energy In Fuel (Heat Of Combustion) | kW | 524,0 |
| Gross Heat To Power | kW | 201,0 |
| Energy To Coolant And Lubricating Oil | kW | 96,0 |
| Energy To Exhaust | kW | 165,0 |
| Heat To Radiation | kW | 20,0 |

GVP SERIES

GVP 220

GENPOWER[®]

GENERATOR

231/400V - 50Hz

GENPOWER Alternator Technical Parameters and Specifications

Alternator Technical Parameters

| | | | | | |
|------------------|--------|--------------|---------------------------------|----------|--------------|
| Insulation Class | | H | Field Control System | | Self excited |
| Winding Pitch | | 2/3 - (N° 6) | A.V.R. Model | Standard | SX460 |
| Wires | | 12 | Voltage Regulation | % | ± 1 |
| Protection | | IP 23 | Sustained Short-Circuit Current | 10 sec | 300% (3 IN) |
| Altitude | m | 1000 | Total Harmonic (*) TGH / THC | % | < 4 |
| Overspeed | rpm | 2250 | Wave Form :NEMA = TIF - (*) | | < 50 |
| Air Flow | m³/sec | 0.514 | Wave Form :I.E.C. = THF - (*) | % | < 2 |
| Bearing Drive | N/A | - | Bearing Non - Drive | Bearing | 6310-2RZ |
| Rotor Winding | 100% | Copper | Stator Winding | 100% | Copper |

(*) Total harmonic content line to line, at no load or full rated linear and balanced load

Genpower sychron alternators are produced according to TSE 60034-1; IEC 60034-22; GB755; BS4999-5000; NEMA MG 1.22 standards

Alternator Specifications

50 Hz - 231/400V - Cos Q 0,8 - 1500 rpm

Standard Using Alternator

| Brand/Model | Genpower | 270M1 | Optional Using Alternator | | Leroy Somer | TAL046B | Stamford | UC274H | |
|-------------------|----------|---------|---------------------------|---------|-------------|---------|----------|------------|---------|
| Duty | | | Continuous | | | | | Stand By | |
| Ambient | C° | | 40°C | | | | | 27°C | |
| Class/Temp. Rise | C° | | H / 125° K | | | | | H / 163° K | |
| Series Star (V) | V | 380/220 | 400/231 | 415/240 | 1 Phase | 380/220 | 400/231 | 415/240 | 1 Phase |
| Parallel Star (V) | V | 190/110 | 200/115 | 208/120 | 220 | 190/110 | 200/115 | 208/120 | 220 |
| Series Delta (V) | V | 220 | 230 | 240 | 230 | 220 | 230 | 240 | 230 |
| Output Power | kVA | 214,0 | 214,0 | 222,0 | - | 235,0 | 235,0 | 244,0 | - |
| Output Power | kW | 171,0 | 171,0 | 178,0 | - | 188,0 | 188,0 | 195,0 | - |

Control Panel Specifications

Powder Painted Steel Pannel with Lockable Door
ATS (Automatic Transfer Panel) - Optional
Control Module
Backlit, 128x64 Pixels

Control Module Technical Parameters

Brand
Dimensions
Weight
Ambient Humidity
DC Battery Supply Voltage
Network Frequency
Generator Voltage Measurement
Current Transformer Secondary
Charge Alternator Voltage Measurement
Communication Interface
Generator Contactor Relay Output
Solenoid Transistor Outputs
Configurable-3 Transistor Outputs

Control Module Functions

Mains Voltage Level Control
Network Frequency Level Control
Engine Operating Option Control
Engine Stop Option Control
Engine Speed (RPM) Level Control
Battery Voltage Options Control
Check Engine Maintenance Times
Communication Interfaces GPRS, GSM
Engine Speed
Voltage

Control Module Alerts

Emergency Stop Malfunction
High Generator Voltage
Low Generator Frequency
Low Load
Over Current
Unbalanced Current

Sound Proof Canopy and Base Frame (Chassis) Specifications

Special, Registered GENPOWER Design and Color
A1 Quality DKP / HRU / Galvanized Steel
Sensitive Twist on Automatic Press Brake
Delicate Cut on Automatic Punch and Laser Bench
Sensitive Welding on Robotic Welding Bench
Chemical Cleaning Nano Technology Before Painting

Special Products / Non - Standardized

Synchronised Systems
Scada Systems
Mobile Systems
Light Towers
Ground Power Unit Generators

Quality Documents & Certificates

Trademark Registration Certificate
Capacity Report (32400 Units / Year)
Made in Turkey Certificate- For Generator/1-5000 kVA
Made in Turkey Certificate-For Alternator/1-5000kVA
Made in Turkey Certificate- For Engine/1-5000 kW
Certificate of Competency for After Sales Services
2014/30/EU Electromagnetic Compatibility Directive
CE Certificate - 2000/14/AT - 2000/14 EC (CE 2195)

Battery Charger
Emergency Stop Button
Backlit, 128x64 Pixels

GENPOWER

120mm x 94mm

260 gr.

90% max.

8 - 32 V

5 - 99.9 Hz

3 - 300 V

5A

8 - 32 V

RS-232

5A & 250V

1A with DC Supply

1A with DC Supply

Generator Voltage Level Control

Generator Frequency Level Control

Generator Current Level Control

Generator Power Level Control

Generator Work Schedule and Timing Control

Oil Pressure Controllers Control

Configurable Analog Inputs and Outputs

Keeping Error Records of Past Events

Configurable Programmable Digital Inputs and Outputs

Current and Frequency

Low Generator Voltage

High Generator Frequency

Phase Sequence Error

Overload

Low Water Level (Optional)

Low Oil Pressure

Robotic Painting with Electrostatic Powder Paint

Drying and Stabilizing on 200°C Ovens

1500 Hour Salt Test

Glasswool Isolation, A1 Class Material -50/+500°C

Special Covering Over Glass Wool

Best Sound Level (in dBA)

Generators - with Trailer

Medium Voltage - MV

IP44-IP54 Class Generators

Welding Machines

Natural Gas Generator

Industrial Registry Certificate

Certificate of Manufacturing Competence

TSE- Service Adequacy Certificate

ISO 9001 - 2015 Certificate

ISO 14001 - 2015 Certificate

OHSAS 18001 - 2007 Certificate

2006/42/EC Machinery Directive

Coatchem- Türkak 1500 Hours Corrosion Durability Test Certificate

Control Relays
Terminal Blocks
Load Output Terminal

Model

Protection Class

Environmental Conditions

Ambient Temperature

Battery Voltage Measurement

Mains Voltage Measurement

Generator Frequency

Working Period

Charge Alternator Excitation

Analog Sender Measurement

Mains Contactor Relay Output

Start Transistor Outputs

Configurable-4 Transistor Outputs

3 phase Generator Protections

- High / Low Voltage

- High / Low Frequency

- Current / Voltage Asymmetry

- Overcurrent / Overload

Overheat Control

1 Phase or 3 Phase, Phase Selection

Parameter Setting via Control Module

Water Temperature

Phase Sequence

Low Water Temperature

Heat Sensor Broken

Reverse Power

Start Error

Stop Error

Magnetic Pickup Error

Temperature Tests

Rustproof Accessories

Cable Exit Connectors and Glands

Emergency Stop Button

Fuel Level Gauge

Fuel Drain Cap

DC Generators

High Voltage - HV

Power Plants

Trigeneration Systems

Biogas Generator

TSE 8528 - 4 Certificate

TSE 8528 - 5 Certificate

TSE 8528 - 8 Certificate

AB-0547-T Certificate

EAC - GOST Certificate/ Diesel Generator

EAC - GOST Certificate/ Gasoline Generator

CE Certificate - EN ISO 17050-1,2004

Fuel Inlet and Return Records

Impermeability Test for Fuel Tank

Vacuummed Rubber Mounted

High Quality Weatherstrips

High Quality Shock Absorbers

Fuel Filling Cap (with ventilation)

High Frequency Generators

Variable Speed Generators

Super Silent Canopy

Cogeneration Systems

LPG Generator

TS EN ISO 2409 Certificate

TS EN ISO 4628-3 Certificate

TS EN ISO 4628-4 Certificate

TS EN ISO 4628-5 Certificate

TS EN ISO 4628-8 Certificate

TS EN ISO 9227 Certificate

TS 9620 EN ISO 4628-2 Certificate

TS EN 60034 - 1 Certificate

System Protection MCBs

Circuit Breaker - Optional

LCD Screen

Trans-MIDIAMF.232.GP

IP65 From the Front

2000 Meters Above Sea Level

-20 ° C to + 70 ° C

8 - 32 V

3 - 300 V Phase-Neutral, 5 - 99.9 Hz

5 - 99.9 Hz

Continuous

210mA & 12V, 105mA & 24V Nominal 2.5W

0 - 1300ohm

5A & 250V

1A with DC Supply

1A with DC Supply

Alarm Horn

Heater Tube Thermostat Control

Modbus and SNMP

Working Hour

Ground Leakage

Analog Modem

Ethernet, USB, RS232, RS485

Selectable Protection Alarm / Shutdown

Battery Voltage

Oil Pressure

High Oil Temperature (Optional)

Low Fuel Level (Optional)

High Battery Voltage

Low Battery Voltage

High Water Temperature

Electronic Canbus Errors (ECU)

Lifting and Carrying Equipments

Internal Exhaust Mufflers (Silencers)

External Exhaust Mufflers (Silencers)

Radiator Water Filling Cap

Daily Fuel Tank

External Fuel Tank

Marine Generators

Dual Generators

Automatic Voltage Stabilizers

Electrical and Diesel Forklift

HFO Generator

EN ISO 8528-13,2016 Certificate

EN ISO 12100:2010 Certificate

EN ISO 13857:2008 Certificate

EN ISO 14120:2015 Certificate

EN 349:1993+A1:2008 Certificate

EN 60204-1:2018 Certificate

EN 61000-6-2,2019 Certificate

EN 61000-6-4,2007/A1:2011 Certificate

GVP SERIES

GVP 220

GENPOWER[®]


GENERATOR

231/400V - 50Hz

Generator Dimensions

| Values | | Open Type Generator | Canopy Type Generator |
|--------------------|----|---------------------|-----------------------|
| Width | mm | 1003 | 1110 |
| Length | mm | 2400 | 2960 |
| Height | mm | 1885 | 1727 |
| Weight (Empty) | Kg | 1760 | 2190 |
| Fuel Tank Capacity | L | 256 | 376 |

Generator Technical Drawings

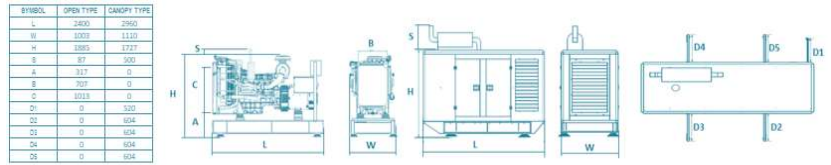

Diesel Engine and Genset Rating Classifications

The below ratings represent the engine performance capabilities to conditions specified in TS ISO 8528/1, 8528-4, 8528-5, 8528-8, BS5000, ISO 3046/1:1986, NEMA MG-1.22.1, BS 5514/1.

STAND BY POWER RATING (ESP):

ESP is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Stand By Power rating. This rating should be applied where reliable utility power is available. A Stand By rated engine should be sized for a maximum of an 70% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Stand By Power rating. Stand By ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

PRIME POWER RATING (PRP):

Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER (ULTP):

PRP (Prime Power) is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER (LTP):

LTP (Limited Time Prime Power) is available for a limited number of hours in a nonvariable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating.

CONTINUOUS POWER RATING (COP):

COP is the power that the engine can continue to use under the prescribed speed and the specified environment condition in the normal maintenance period stipulated in the manufacturing plant. And Continuous Power is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

PAY ATTENTION to the points below in picking and using the generator

* Generators can work on Continuous Power at 70% of Prime power value if only all maintenances are done on time with original spare parts and high quality oils that manufacturer advice.

* Generators should not operate below 50% of Prime Power value. In such a case, the engine will burn excessive oil and eventually have irreparable damage.

* If your need is 1000 kVA or above, you should prefer Synchronic Systems with 2-3 generators with failure back up and simultaneous aging.


* These points will provide advantage for you with purchasing and operating the generator.

Fuel Consumption - Oil Recommendation and Oil Grades

| Fuel Consumption | |
|------------------------|------|
| Percent of Prime power | l/hr |
| 110% | 51,7 |
| 100% | 46,0 |
| 75% | 34,1 |
| 50% | 23,1 |

Note: The density of diesel is 0.835 kg/L

Fuel specification: BS 2869: Part 2 1998 Class A2 or (DIN EN 590) ASTM D975 D2 Diesel. The fuel must be clean and without water)

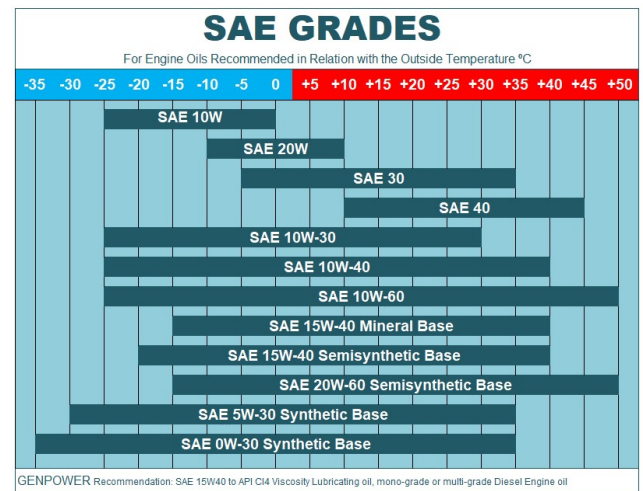

Why You Should Buy GENPOWER?

Only because it is the biggest generator factory in the World? NO!

- * It is one of the most trustworthy and distinguished generator manufacturers in the world with its almost half century experience in the field.
- * It has interiorized the strategy of **unconditional customer satisfaction** and has been working with this work ethic together with its whole crew.
- * Customers and end users get their moneys' worth and more with every penny.
- * It has become a big family with customers and users who receive durable, long-lasting and high quality products.
- * It has been appreciated many times by customers and suppliers about the investments that have been made for quality enhancement.
- * Both its suppliers and customers always know GENPOWER is and will always be there for them. GENPOWER on their side in bad and good days.
- * In order not to harm brand reputation and recognition, each day, they work harder than the day before.
- * It continues its business only with the suppliers, customers, dealers and technical services that also embrace the same mind set and work ethics.
- * It proves its loyalty for quality and customer satisfaction with its mottoes **"Your power is the core of our business"** and **"nothing will be left unfinished"**
- * The specifications and/or modifications you can receive with extra costs by other manufacturers are included in standard production in GENPOWER
- * When you purchase GENPOWER products, you are not a customer or a buyer but GENPOWER perceives and accepts you as a valuable member of its continuously growing family.

These are why you should buy from GENPOWER...

GENPOWER[®]
GENERATOR



Factory Address

ASO II. Industrial Zone
2010 Street No: 18
06909 Temelli-Sincan/Ankara, Turkey
Tel/ Fax: +90(312) 641 32 22 ~ 641 32 23
genpower@genpower.com.tr
www.genpower.com.tr