


GCC SERIES

GENPOWER
GENERATOR

When you need

GCC 900

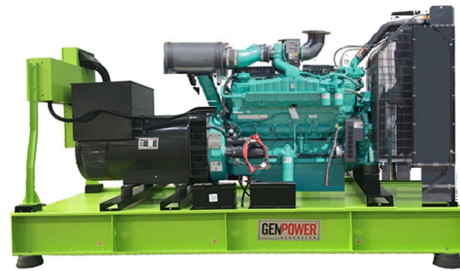

STANDARD SPECIFICATIONS

General Specifications

Genset Model		GCC 900	Fuel		Diesel
Stand By Power	kVA / kW	900 / 720	Stand By Ampers	Amp.	1301
Prime Power	kVA / kW	818 / 655	Prime Ampers	Amp.	1182
Continuous Power	kVA / kW	573 / 458	Continuous Ampers	Amp.	828
Engine Brand		CUMMINS	Engine Model		QSK23G3
Alternator Brand		GENPOWER	Alternator Model		GNP 355 LX
Speed	rpm	1500	Frequency	Hz	50
Voltage	V	231 / 400	Power Factor	Cos φ	0,8
Cooling System		Water Cooled	Usage Type		Automatic / Manual

Genset Rating Classifications

The below ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS 5514/1.

CONTINUOUS POWER RATING - COP

COP is the power that the engine can continue to use under the prescribed speed and the specified environment condition in the normal maintenance period stipulated in the manufacturing plant. And continuous power is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

LIMITED TIME RUNNING POWER - LTP

Gensets with a limited-time power rating are designed to operate at a maximum of 500 hours per year, although they can effectively manage an average load factor of up to 100 percent.

PRIME POWER RATING - PRP

PRP is available for unlimited hours per year in variable load application. Variable load should not exceed an average of 70% of the Prime Power rating during any operating period of 24 hours. The Total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12 hours period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

STAND BY POWER (EMERGENCY) RATING - ESP

ESP is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. A standby rated engine should be sized for a maximum of a 70% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating.

PAY ATTENTION to the points below in picking and using the generator

* Generators can work on Continuous power at 70% of Prime power value if only all maintenances are done on time with original spare parts and high quality oils that manufacturer advice.

* Generators should not operate below 50% of prime power value. In such a case, the engine will burn excessive oil and eventually have irreparable damage.

* If your need is 1000 kVA or above, you should prefer synchronic systems with 2-3 generators with failure back up and simultaneous aging.

* These points will provide advantage for you with purchasing and operating the generator.

TECHNICAL SPECIFICATIONS



GENPOWER®

GENERATOR

environment friendly

DIESEL ENGINE

Engine Technical Specifications

Technical Parameters

Number Of Cylinders	6
Configuration	Vertical, in line
Aspiration	Turbo Charged&Aftercooled
Combustion System	Direct injection
Compression Ratio	16:1
Bore	mm 170
Stroke	mm 170
Displacement	L 23,15
Governing Type	Electronic
Governing Class	G3
Rotation	Counterclockwise
Firing order	1-5-3-6-2-4
Emission	Non-Regulated

Gross Engine Power	kW	768
Net Engine Power	kW	739
Fan and belt Power Consumption	kW	14,4
Other Power Loss	kW	14,6
Mean Effective Pressure	kPa	2653
Intake Air Flow	m ³ /min.	53,28
Exhaust Temperature Limit	°C	543
Exhaust Flow	m ³ /min.	147,7
Heat Rejection To Ambient (Radiated)	kW	65
Mean Piston Speed	m/s	8,5
Cooling Fan Air Flow	m ³ /min.	810
Typical Generator Output Power	kVA	878
Generator Efficiency	%	95

Electrical System

Voltage	V	24
Starter	kW	8
Alternator Output Amperes	A	35
Alternator Output Voltage	V	28
Batteries Capacity	Ah	2x143

Heat Rejection

Energy In Fuel (Heat Of Combustion)	kW	1555
Gross Heat To Power	kW	768
Energy To Coolant And Lubricating Oil	kW	215
Energy To Exhaust	kW	507
Heat To Radiation	kW	65

Fuel Consumption

Standby - Load 100%	(L/h)	178
Prime - Load 100%	(L/h)	161
Prime - Load 75%	(L/h)	121
Prime - Load %50	(L/h)	85

Cooling System

Radiator Type	50°C	Tropical
Total Coolant Capacity	L	120
Max. Perm. Coolant Outlet Temperature	°C	110
Max. Perm. Flow Resis. (Cool. System And Piping)	bar	0,5
Max. Temperature Of Coolant Warning	°C	95
Max. Temperature Of Coolant Shutdown	°C	98
Thermostat operation temperature- Initial Open	°C	82
Thermostat operation temperature- Full Open	°C	93
Delivery Of Coolant Pump	Lt/sec.	4,8
Min. Pressure Before Coolant Pump	bar	0,25
Radiator Face area	m ²	1,68
Rows	Row	3
Matrix Density	Per/Inch	12
Material		Aluminum
Width Of Matrix	mm	1250
Height Of Matrix	mm	1350
Pressure Cap Setting	kPa	90
Estimated Cooling Air Flow Reserve	kPa	0,125
Engine Pre Heater Tube (with Circulation Pump)	W	3000

Note:The density of diesel is 0.835 kg/L


Fuel specification: BS 2869: Part 2 1998 Class A2 or ASTM D975 D2 Diesel.

The fuel must be clean and without water

Lubrication System

Total System	L	103
Minimum Oil Level	L	80
Nominal Motor Operating Temperature	°C	50
Lubricating Oil Pressure	bar	5,2
Relief Valve Opens	kPa	200-280
Oil, Fuel Consumption Ratio		<0,1
Normal Oil Temperature	°C	120

Recommendation: SAE 15W40 to API CI4 Viscosity Lubricating oil, mono-grade or multi-grade oil

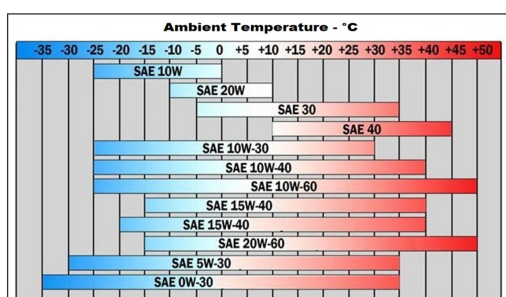

Fan

Diameter	mm	1200
Drive Ratio		1:1
Number Of Blades		9
Material		Metal
Type		Blowing

Filters

Air Filter	Dry Type, replaceable
Fuel Filter	With water separator
Oil Filter	Element type, particulate trap

STANDARD SPECIFICATIONS

TECHNICAL SPECIFICATIONS



ISO 9001:2008
OHSAS 18001:2007
ISO 14001:2004





legend of power

ALTERNATOR CANOPY & BASE FRAME

Alternator Technical Specifications

Technical Parameters

Insulation Class		H	Field Control system		Self excited
Winding Pitch		2/3 - (N° 6)	A.V.R. Model	Standard	MX341+PMG
Wires		12	Voltage Regulation	%	± 1
Protection		IP 23	Sustained Short-Circuit Current	10 sec	300% (3 IN)
Altitude	m	1000	Total Harmonic (*) TGH / THC	%	< 4
Overspeed	rpm	2250	Wave Form : NEMA = TIF - (*)		< 50
Air Flow	m³/sec	1,035	Wave Form : I.E.C. = THF - (*)	%	< 2
Bearing Drive	N/A	-	Bearing Non - Drive	Bearing	6314-2RZ
Rotor Winding	100%	Copper	Stator Winding	100%	Copper

(*) Total harmonic content line to line, at no load or full rated linear and balanced load

Specifications

Standard: Genpower / GNP355LX - Optionally: Leroy Somer / TAL049C & Stamford / LV6D1 – HC6H1									
								Frequency- Hz	50
								Power Factor- CosQ	0,8
Duty		Continuous				Stand By			
Ambient	C°	40°C				27°C			
Class/Temp. Rise	C°	H / 125° K				H / 163° K			
Series Star (V)	V	380/220	400/231	415/240	1 Phase	380/220	400/231	415/240	1 Phase
Parallel Star (V)	V	190/110	200/115	208/120	220	190/110	200/115	208/120	220
Series Delta (V)	V	220	230	240	230	220	230	240	230
Output Power	kVA	850	850	882	-	935	935	970	-
	kW	680	680	706	-	748	748	776	-

Genpower synchron alternators are produced according to TSE 60034-1; IEC 60034-22; GB755; BS4999-5000; NEMA MG 1.22 standards

Sound Proof Canopy Specifications

General Specifications

Special and registered Genpower Design
A1 quality DKP / HRU / Galvanized Steel
Sensitive twist on automatic Press Brake
Spray system chemical cleaning in 11 pools with nano technology before painting
Provide homogeneity on 280 meters of conveyor line
Glasswool isolation with A1 quality material with -50/+500C temperature durability
Hinges, locks, bolts, nuts made from rustproof material
Temperature tests for different environments
Cable exit connectors and conduits
Emergency stop button
Radiator water filling cap

Special and registered Genpower Color
Delicate Cut on Automatic Punch and Laser bench
Sensitive welding on robotic welding bench
Robotic painting with electrostatic powder paint
Drying and stabilizing on 200°C ovens
Special covering over glass wool
1500 hour salt test (accredited laboratory certificated)
Best sound level (in dBA)
Lifting and carrying equipments
High quality weatherstrips and shock absorbers
Internal and/or external exhaust mufflers (silencers)

Base Frame (Chasis) Specifications

General Specifications

Special and registered Genpower Design
A1 quality DKP / HRU / Galvanized Steel
Sensitive twist on automatic Press Brake
Spray system chemical cleaning in 11 pools with nano technology before painting
Provide homogeneity on 280 meters of conveyor line
Standart fuel tank is in the chasis (external tank is used for some models)
Fuel level gauge
Fuel drain cap
Lifting and carrying equipments

Special and registered Genpower Color
Delicate Cut on Automatic Punch and Laser bench
Sensitive welding on robotic welding bench
Robotic painting with electrostatic powder paint
Drying and stabilizing on 200°C ovens
Impermeability test for fuel tank with special equipments
Fuel filling cap
Fuel inlet and return records
Vibration absorbing and vacuumed feet under chasis



GENPOWER[®]
GENERATOR

time to restart

CONTROL PANEL & MODULE

Control Panel Specifications

General Specifications

Powder painted steel panel with lockable door
Emergency stop button
ATS (automatic transfer panel) - optional (internal and/or external)
Load output terminal
Control relays

Control module - backlit LCD screen 128x64 pixels
Battery charger
Circuit breaker - optional (internal and/or external)
System protection MCB's
Terminal Blocks

Control Module Technical Parameters

Brand GENPOWER
Dimensions 120mm x 94mm
Weight 260 gr.
Ambient Humidity 90% max.
DC Battery Supply Voltage 8 - 32 V
Network Frequency 5 - 99,9 Hz
Generator Voltage Measurement 3 - 300 V
Current Transformer Secondary 5A
Charge Alternator Voltage Measurement 8 - 32 V
Communication Interface RS-232
Generator contactor Relay Output 5A & 250V
Solenoid Transistor Outputs 1A with DC supply
Configurable-3 Transistor Outputs 1A with DC supply

Model Trans-MIDIAMF.232.GP
Protection Class IP65 from the front
Environmental conditions 2000 meters above sea level
Ambient temperature -20 ° C to + 70 ° C
Battery Voltage Measurement 8 - 32 V
Mains Voltage Measurement 3 - 300 V Phase-Neutral, 5 - 99.9 Hz
Generator Frequency 5 - 99.9 Hz
Working Period Continuous
Charge Alternator Excitation 210mA & 12V, 105mA & 24V Nominal 2.5W
Analog Sender Measurement 0 - 1300ohm
Mains contactor Relay Output 5A & 250V
Start Transistor Outputs 1A with DC supply
Configurable-4 Transistor Outputs 1A with DC supply

Control Module Functions

Mains Voltage Level Control
Network Frequency Level Control
Engine Operating Option Control
Engine Stop Option Control
Engine Speed (RPM) level Control
Battery Voltage Options Control
Check Engine Maintenance Times
Keeping error records of past events
Communication interfaces GPRS, GSM
Analog Modem
Selectable protection alarm / shutdown
Configurable analog inputs and outputs
3 phase Generator protections
- High / low voltage
- High / low frequency
- Current / voltage asymmetry
- Overcurrent / overload

Working Hour
Ground Leakage
Engine Speed, Oil Pressure, Water Temperature, Hours of Operation, Battery Voltage Display
Generator, Voltage, Current, Frequency, Phase Sequence, Earthing Display

Generator Voltage Level Control
Generator Frequency Level Control
Generator Current Level Control
Generator Power Level Control
Generator Work Schedule and Timing Control
Oil Pressure Controllers Control
Overheat Control
Mains, Generator ATS control
Ethernet, USB, RS232, RS485
Modbus and SNMP
Easy Parameter Setting via control module or computer
Configurable programmable digital inputs and outputs
3 phase AMF function
- High / low frequency
- High / low voltage
- High / low water temperature
- High / low load

Alarm Horn
Heater Tube Thermostat control
Single-Phase or Three-Phase, Phase Selection
Network, Voltage, Frequency Display


Control Module Alerts

Emergency Stop Malfunction
High Generator Voltage
Low Generator Frequency
Low Load
Over Current
Unbalanced Current
Oil Sensor Broken
Magnetic Pickup Error

Low Generator Voltage
High Generator Frequency
Phase Sequence Error
Overload
Low Water Level (Optional)
Low Oil Pressure
High Water Temperature
Low Fuel Level (Optional)

Low Water Temperature
Heat Sensor Broken
Reverse Power
Start Error
Stop Error
High Battery Voltage
Low Battery Voltage
Electronic Canbus Errors (ECU Engines)

Charge Alternator Error
Unbalanced Load
Maintenance Time Alarm
Low Speed
High speed
High Oil Temperature (Optional)



GENPOWER[®]


GENERATOR

beyond the lines

**GENERAL DIMENSIONS
SPECIAL PRODUCTS & CERTIFICATES**

General Dimensions

SYMBOL	OPEN TYPE	CANOPY TYPE
L	3950	5929
W	1650	2100
H	2220	2405
S	-	700
A	550	
B	1250	
C	1350	
D1	0	1050
D2	0	1044
D3	0	1044
D4	0	-
D5	0	-

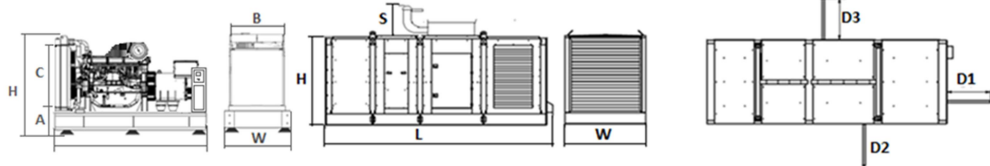

Open Type Generator Dimensions

Width	mm	1650
Length	mm	3950
Height	mm	2220
Weight (Net)	Kg	5620
Fuel Tank Capacity	L	1290

Canopy Type Generator Dimensions

Width	mm	2100
Length	mm	5929
Height	mm	2405
Weight (Net)	Kg	9270
Fuel Tank Capacity	L	2000

Special Products / Non - Standardized

Synchronised Systems
Scada Systems
Mobile Systems - On Trucks and Bus
Light Towers
Welding Machines - Generators
High Frequency Generators - 100-200-400-800-1000 Hz
Variable speed Generators
Super Silent Canopy
Ground Power Unit Generators - Mobile or Stationary

Generators - with Trailer
Medium Voltage - MV Generators
High Voltage - HV Generators
IP44-IP54 Class Generators
Marine Generators
Dual Generators
Direct Current - DC Generators
Power Plants
Cogeneration Systems
Trigeneration Systems

Generators - with Heavy Oil Engines
Generators - with Natural Gas Engines
Generators - with Biogas Engines
Generators - with Dual Fuel Engines
Generators - with LPG Engines
UPS Systems
Electrical Forlift / 0,5 - 3,5 Tons
Diesel Forklift / 1 -7,5 Tons
Automatic Voltage Stabilizers / 1-5000 kVA

Quality Documents & Certificates

ISO 9001 - 2015 Certificate
OHSAS 18001 - 2007 Certificate
TSE 8528 - 8 Certificate
Trademark Registration Certificate
Capacity Report (32400 Units / Year)
Made in Turkey Certificate- For Generator/ 1 - 5000 kVA
Made in Turkey Certificate-For Alternator/ 1-5000kVA
Made in Turkey Certificate- For Engine/1-5000 kW
2006/42/EC Machinery Directive
EN ISO 12100:2010 Certificate
EN 349:1993+A1:2008 Certificate
EN 61000-6-2:2019 Certificate
TS EN ISO 9227 Certificate
TS EN ISO 4628-5 Certificate
EAC - GOST Certificate/ For Diesel Generators and parts
EAC - GOST Certificate/ For Gasoline Generators and parts
EN ISO 8528-13:2016 Certificate
EN ISO 13857:2008 Certificate
Coatchem- Türkak 1500 hours Corrosion Durability Test Certificate

ISO 14001 - 2015 Certificate
TSE 8528 - 4 Certificate
TSE 8528 - 5 Certificate
Industrial Registry Certificate
Certificate of Competency for After Sales Services
Certificate of Manufacturing Competence
TSE- Service Adequacy Certificate
2014/30/EU Electromagnetic Compatibility Directive
EN 60204-1:2018 Certificate
EN ISO 14120:2015 Certificate
CE Certificate - EN ISO 17050-1:2004
TS EN ISO 4628-3 Certificate
TS EN ISO 4628-8 Certificate
TS EN 60034 - 1 Certificate
TS EN ISO 4628-4 Certificate
TS EN ISO 2409 Certificate
AB-0547-T Certificate
EN 61000-6-4:2007/A1:2011 Certificate
TS 9620 EN ISO 4628-2 Certificate

CE Certificate- 2000/14/AT - 2000/14 EC (CE 2195- Noise Emission in the Environment by Equipment for use Outdoors)



ISO 9001:2008
OHSAS 18001:2007
ISO 14001:2004



TECHNICAL SPECIFICATIONS



GLOBAL BRAND



TECHNICAL SPECIFICATIONS



GENPOWER[®]
GENERATOR

Factory Address

ASO II. Industrial Zone

2010 Street No: 18

06909 Temelli-Sincan/Ankara, Turkey

Tel/ Fax: +90(312) 641 32 22 - 641 32 32

info@genpower.com.tr

genpower@genpower.com.tr

www.genpower.com.tr



ISO 9001:2008
OHSAS 18001:2007
ISO 14001:2004



GENPOWER RESERVES THE RIGHT TO CHANGE THE CATALOGUES, PRODUCTS, MODELS AND TECHNICAL SPECIFICATIONS