


GVP SERIES

GVP 770

GENPOWER[®]

GENERATOR

231/400V - 50Hz

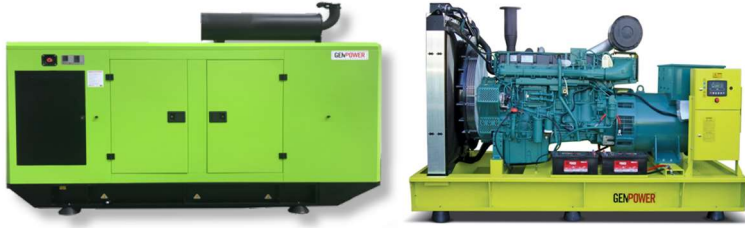

Features and Benefits

- Half Century Experience in Generator Manufacturing
- Diesel Engines with Advanced Technology and Quality
- Alternators with Advanced Technology and Quality
- Control Panel Suitable for Flexible Application
- High Quality and Reliable Technology
- Patented Compact Designed and Soundproof Canopy
- Suitable for Heavy-Duty
- Durability
- Wide Range of Affordable Spare Parts
- Low Noise Level
- Low Exhaust Emission
- Low Operating Cost
- Low Fuel Consumption
- Low Oil Consumption
- Tropical 50°C Radiator
- Fuel Filter with Water and Particle Separator
- First Class Product Support
- Global Technical Service and Maintenance Support

Generator General Information

Generator	Frequency	Voltage	Power Factor	Speed	Diesel Engine		Alternator			Type of	Generator Output		
Model	Hz	V	CosQ	rpm	Brand	Model	Brand	Model	Series	Operation	kVA	kW	A
GVP 770	50	231/400	0,8	1500	VOLVO PENTA	TWD 1645 GE	GENPOWER	GNP	GNP 355 MX	Stand By Prime Continuous	770,0 700,0 490,0	616,0 560,0 392,0	1.112,7 1.011,6 708,1

VOLVO PENTA Diesel Engine Technical Parameters and Matching Parameters

Diesel Engine Main Technical Parameters

General		
Number of Cylinders		6
Configuration		Vertical, in line
Aspiration		Turbo Charged & WAC
Combustion System		Direct injection
Compression Ratio		16.8:1
Bore	mm	144
Stroke	mm	165
Displacement	L	16,12
Governing Type		Electronic
Governing Class		G3
Rotation		Counterclockwise
Firing Order		1-5-3-6-2-4
Emission		EU Stage 2
Filters		
Air Filter		Dry Type, replaceable
Fuel Filter		Element type, replaceable
Oil Filter		Element type, particulate trap
Electrical System		
Voltage	V	24
Starter	kW	7
Alternator Output Amper	A	80
Alternator Output Voltage	V	28
Batteries Capacity	Ah	2x135
Fan		
Diameter	mm	965
Drive Ratio		1.04:1
Number of Blades		9
Material		Composite
Type		Blowing

Cooling System

Radiator Type	50°C	Tropical
Total Coolant Capacity	L	142
Max. Perm. Coolant Outlet Temperature	°C	105
Max. Perm. Flow Resis. (Cool. System And Piping)	bar	0,5
Max. Temperature of Coolant Warning	°C	95
Max. Temperature of Coolant Shutdown	°C	98
Thermostat Operation Temperature - Initial Open	°C	82
Thermostat Operation Temperature - Full Open	°C	92
Delivery of Coolant Pump	m ³ /h	4,80
Min. Pressure Before Coolant Pump	bar	0,25
Radiator Face Area	m ²	1,77
Rows	Row	4
Matrix Density	Per / Inch	10
Material		Aluminum
Width of Matrix	mm	1280
Height of Matrix	mm	1385
Pressure Cap Setting	kPa	90
Estimated Cooling Air Flow Reserve	kPa	0,125
Engine Pre Heater Tube (with Circulation Pump)	W	3000

Lubrication System

Total System	L	48
Minimum Oil Level	L	32
Nominal Motor Operating Temperature	°C	50
Lubricating Oil Pressure (Rated Speed)	bar	6,5
Relief Valve Opens	kPa	460
Oil / Fuel Consumption Ratio	%	0,1
Normal Oil Temperature	°C	130

Diesel Engine Matching Parameters

50 Hz @ 1500 r/min		Stand By
Gross Engine Power	kW	675,0
Net Engine Power	kW	654,0
Fan Power Consumption (Belt Pulley Driven)	kW	21,0
Other Power Loss	kW	-
Mean Effective Pressure	MPa	3400,00
Intake Air Flow	m ³ / min	43,50
Exhaust Temperature Limit	°C	501
Exhaust Flow	m ³ / min	106,00
Boost Pressure Ratio		26,00
Mean Piston Speed	m / s	8,3
Cooling Fan Air Flow	m ³ / min	564,0
Typical Generator Output Power	kVA	777

Heat Rejection

Heat Rejection		Stand By
Energy In Fuel (Heat Of Combustion)	kW	1579,0
Gross Heat To Power	kW	675,0
Energy To Coolant And Lubricating Oil	kW	259,0
Energy To Exhaust	kW	473,0
Heat To Radiation	kW	26,0

GENPOWER Alternator Technical Parameters and Specifications

Alternator Technical Parameters

Insulation Class		H	Field Control System		Self excited
Winding Pitch		2/3 - (N° 6)	A.V.R. Model	Standard	SX440
Wires		12	Voltage Regulation	%	± 1
Protection		IP 23	Sustained Short-Circuit Current	10 sec	300% (3 IN)
Altitude	m	1000	Total Harmonic (*) TGH / THC	%	< 4
Overspeed	rpm	2250	Wave Form :NEMA = TIF - (*)		< 50
Air Flow	m³/sec	1,035	Wave Form :I.E.C. = THF - (*)	%	< 2
Bearing Drive	N/A	-	Bearing Non - Drive	Bearing	6314-2RZ
Rotor Winding	100%	Copper	Stator Winding	100%	Copper

(*) Total harmonic content line to line, at no load or full rated linear and balanced load

Genpower synchron alternators are produced according to TSE 60034-1; IEC 60034-22; GB755; BS4999-5000; NEMA MG 1.22 standards

Alternator Specifications

50 Hz - 231/400V - Cos Q 0,8 - 1500 rpm

Standard Using Alternator

Brand/Model	Genpower	355MX	Leroy Somer	TAL049B	Stamford	LV6B			
Duty			Continuous			Stand By			
Ambient	C°		40°C			27°C			
Class/Temp. Rise	C°		H / 125° K			H / 163° K			
Series Star (V)	V	380/220	400/231	415/240	1 Phase	380/220	400/231	415/240	1 Phase
Parallel Star (V)	V	190/110	200/115	208/120	220	190/110	200/115	208/120	220
Series Delta (V)	V	220	230	240	230	220	230	240	230
Output Power	kVA	700,0	700,0	726,0	-	770,0	770,0	799,0	-
Output Power	kW	560,0	560,0	581,0	-	616,0	616,0	639,0	-

Control Panel Specifications

Powder Painted Steel Pannel with Lockable Door
 ATS (Automatic Transfer Panel) - Optional
 Control Module
 Control Module Technical Parameters

Control Module Technical Parameters

Brand: GENPOWER
 Dimensions: 120mm x 94mm
 Weight: 260 gr.
 Ambient Humidity: 90% max.
 DC Battery Supply Voltage: 8 - 32 V
 Network Frequency: 5 - 99,9 Hz
 Generator Voltage Measurement: 3 - 300 V
 Current Transformer Secondary: 5A
 Charge Alternator Voltage Measurement: 8 - 32 V
 Communication Interface: RS-232
 Generator Contactor Relay Output: 5A & 250V
 Solenoid Transistor Outputs: 1A with DC Supply
 Configurable-3 Transistor Outputs: 1A with DC Supply

Control Module Functions

Mains Voltage Level Control
 Network Frequency Level Control
 Engine Operating Option Control
 Engine Stop Option Control
 Engine Speed (RPM) Level Control
 Battery Voltage Options Control
 Check Engine Maintenance Times
 Communication Interfaces GPRS, GSM
 Engine Speed Voltage
 Control Module Alerts

Control Module Alerts

Emergency Stop Malfunction
 High Generator Voltage
 Low Generator Frequency
 Low Load
 Over Current
 Unbalanced Current

Sound Proof Canopy and Base Frame (Chassis) Specifications

Special, Registered GENPOWER Design and Color
 A1 Quality DKP / HRU / Galvanized Steel
 Sensitive Twist on Automatic Press Brake
 Delicate Cut on Automatic Punch and Laser Bench
 Sensitive Welding on Robotic Welding Bench
 Chemical Cleaning Nano Technology Before Painting

Special Products / Non - Standardized

Synchronised Systems
 Scada Systems
 Mobile Systems
 Light Towers
 Ground Power Unit Generators

Quality Documents & Certificates

Trademark Registration Certificate
 Capacity Report (32400 Units / Year)
 Made in Turkey Certificate- For Generator/1-5000 kVA
 Made in Turkey Certificate-For Alternator/1-5000kVA
 Made in Turkey Certificate- For Engine/1-5000 kW
 Certificate of Competency for After Sales Services
 2014/30/EU Electromagnetic Compatibility Directive
 CE Certificate - 2000/14/AT - 2000/14 EC (CE 2195)

Battery Charger
 Emergency Stop Button
 Backlit, 128x64 Pixels

Generator Voltage Level Control
 Generator Frequency Level Control
 Generator Current Level Control
 Generator Power Level Control
 Generator Work Schedule and Timing Control
 Oil Pressure Controllers Control
 Configurable Analog Inputs and Outputs
 Keeping Error Records of Past Events
 Configurable Programmable Digital Inputs and Outputs
 Current and Frequency

Generator Voltage Level Control
 Generator Frequency Level Control
 Generator Current Level Control
 Generator Power Level Control
 Generator Work Schedule and Timing Control
 Oil Pressure Controllers Control
 Configurable Analog Inputs and Outputs
 Keeping Error Records of Past Events
 Configurable Programmable Digital Inputs and Outputs
 Current and Frequency

Low Generator Voltage
 High Generator Frequency
 Phase Sequence Error
 Overload
 Low Water Level (Optional)
 Low Oil Pressure

Robotic Painting with Electrostatic Powder Paint
 Drying and Stabilizing on 200°C Ovens
 1500 Hour Salt Test
 Glasswool Isolation, A1 Class Material -50/+500°C
 Special Covering Over Glass Wool
 Best Sound Level (in dBA)

Generators - with Trailer
 Medium Voltage - MV
 IP44-IP54 Class Generators
 Welding Machines
 Natural Gas Generator

Industrial Registry Certificate
 Certificate of Manufacturing Competence
 TSE - Service Adequacy Certificate
 ISO 9001 - 2015 Certificate
 ISO 14001 - 2015 Certificate
 OHSAS 18001 - 2007 Certificate
 2006/42/EC Machinery Directive
 Coatem- Türkak 1500 Hours Corrosion Durability Test Certificate

Control Relays
 Terminal Blocks
 Load Output Terminal

Model
 Protection Class
 Environmental Conditions
 Ambient Temperature
 Battery Voltage Measurement
 Mains Voltage Measurement
 Generator Frequency
 Working Period
 Charge Alternator Excitation
 Analog Sender Measurement
 Mains Contactor Relay Output
 Start Transistor Outputs
 Configurable-4 Transistor Outputs

3 phase Generator Protections
 - High / Low Voltage
 - High / Low Frequency
 - Current / Voltage Asymmetry
 - Overcurrent / Overload
 Overheat Control
 1 Phase or 3 Phase, Phase Selection
 Parameter Setting via Control Module
 Water Temperature
 Phase Sequence

Low Water Temperature
 Heat Sensor Broken
 Reverse Power
 Start Error
 Stop Error
 Magnetic Pickup Error

Temperature Tests
 Rustproof Accessories
 Cable Exit Connectors and Glands
 Emergency Stop Button
 Fuel Level Gauge
 Fuel Drain Cap

DC Generators
 High Voltage - HV
 Power Plants
 Trigenation Systems
 Biogas Generator

TSE 8528 - 4 Certificate
 TSE 8528 - 5 Certificate
 TSE 8528 - 8 Certificate
 AB-0547-T Certificate
 EAC - GOST Certificate/ Diesel Generator
 EAC - GOST Certificate/ Gasoline Generator
 CE Certificate - EN ISO 17050-1,2004

System Protection MCBs
 Circuit Breaker - Optional
 LCD Screen

Trans-MIDIAMF.232.GP
 IP65 From the Front
 2000 Meters Above Sea Level
 -20 ° C to + 70 ° C
 8 - 32 V
 3 - 300 V Phase-Neutral, 5 - 99.9 Hz
 5 - 99.9 Hz
 Continuous
 210mA & 12V, 105mA & 24V Nominal 2.5W
 0 - 1300ohm
 5A & 250V
 1A with DC Supply
 1A with DC Supply

3 phase AMF Function
 - High / Low Frequency
 - High / Low Voltage
 - High / Low Water Temperature
 - High / Low Load
 Mains, Generator ATS control
 Network, Voltage, Frequency Display
 Parameter Setting via Computer
 Hours of Operation
 Earting

Charge Alternator Error
 Unbalanced Load
 Maintenance Time Alarm
 Low Speed
 High Speed
 Broken Oil Sensor Cable

Fuel Inlet and Return Records
 Impermeability Test for Fuel Tank
 Vacuum Mounted
 High Quality Weatherstrips
 High Quality Shock Absorbers
 Fuel Filling Cap (with ventilation)

High Frequency Generators
 Variable Speed Generators
 Super Silent Canopy
 Cogeneration Systems
 LPG Generator

TS EN ISO 2409 Certificate
 TS EN ISO 4628-3 Certificate
 TS EN ISO 4628-4 Certificate
 TS EN ISO 4628-5 Certificate
 TS EN ISO 4628-8 Certificate
 TS EN ISO 9227 Certificate
 TS 9620 EN ISO 4628-2 Certificate
 TS EN 60034 - 1 Certificate

Alarm Horn
 Heater Tube Thermostat Control
 Modbus and SNMP
 Working Hour
 Ground Leakage
 Analog Modem
 Ethernet, USB, RS232, RS485
 Selectable Protection Alarm / Shutdown
 Battery Voltage
 Oil Pressure
 High Oil Temperature (Optional)
 Low Fuel Level (Optional)
 High Battery Voltage
 Low Battery Voltage
 High Water Temperature
 Electronic Canbus Errors (ECU)

Lifting and Carrying Equipments
 Internal Exhaust Mufflers (Silencers)
 External Exhaust Mufflers (Silencers)
 Radiator Water Filling Cap
 Daily Fuel Tank
 External Fuel Tank

Marine Generators
 Dual Generators
 Automatic Voltage Stabilizers
 Electrical and Diesel Forklift
 HFO Generator

EN ISO 8528-13,2016 Certificate
 EN ISO 12100:2010 Certificate
 EN ISO 13857:2008 Certificate
 EN ISO 14120:2015 Certificate
 EN ISO 14120:2015 Certificate
 EN 349:1993+A1:2008 Certificate
 EN 60204-1:2018 Certificate
 EN 61000-6-2,2019 Certificate
 EN 61000-6-4,2007/A1:2011 Certificate

GVP SERIES

GVP 770

GENPOWER

GENERATOR


231/400V - 50Hz

Generator Dimensions

Values		Open Type Generator	Canopy Type Generator
Width	mm	1400	1900
Length	mm	3629	5000
Height	mm	2511	2300
Weight (Empty)	Kg	4385	5995
Fuel Tank Capacity	L	1041	533

Generator Technical Drawings

SYMBOL	OPEN TYPE	CANOPY TYPE
L	3629	5000
W	1400	1900
H	2511	2300
S	-	630
A	530	-
B	1280	-
C	1385	-
D1	0	1057
D2	0	961
D3	0	961
D4	0	961
D5	0	961

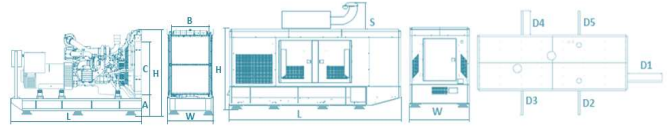

Diesel Engine and Genset Rating Classifications

The below ratings represent the engine performance capabilities to conditions specified in TS ISO 8528/1, 8528-4, 8528-5, 8528-8, BS5000, ISO 3046/1:1986, NEMA MG-1.22.1, BS 5514/1.

STAND BY POWER RATING (ESP):

ESP is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Stand By Power rating. This rating should be applied where reliable utility power is available. A Stand By rated engine should be sized for a maximum of an 70% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Stand By Power rating. Stand By ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

PRIME POWER RATING (PRP):

Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER (ULTP):

PRP (Prime Power) is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER (LTP):

LTP (Limited Time Prime Power) is available for a limited number of hours in a nonvariable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating.

CONTINUOUS POWER RATING (COP):

COP is the power that the engine can continue to use under the prescribed speed and the specified environment condition in the normal maintenance period stipulated in the manufacturing plant. And Continuous Power is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

PAY ATTENTION to the points below in picking and using the generator

* Generators can work on Continuous Power at 70% of Prime power value if only all maintenances are done on time with original spare parts and high quality oils that manufacturer advice.

* Generators should not operate below 50% of Prime Power value. In such a case, the engine will burn excessive oil and eventually have irreparable damage.

* If your need is 1000 kVA or above, you should prefer Synchronic Systems with 2-3 generators with failure back up and simultaneous aging.


* These points will provide advantage for you with purchasing and operating the generator.

Fuel Consumption - Oil Recommendation and Oil Grades

Fuel Consumption	
Percent of Prime power	l/hr
110%	149,6
100%	134,5
75%	103,5
50%	73,2

Note: The density of diesel is 0.835 kg/L

Fuel specification: BS 2869: Part 2 1998 Class A2 or (DIN EN 590) ASTM D975 D2 Diesel. The fuel must be clean and without water)

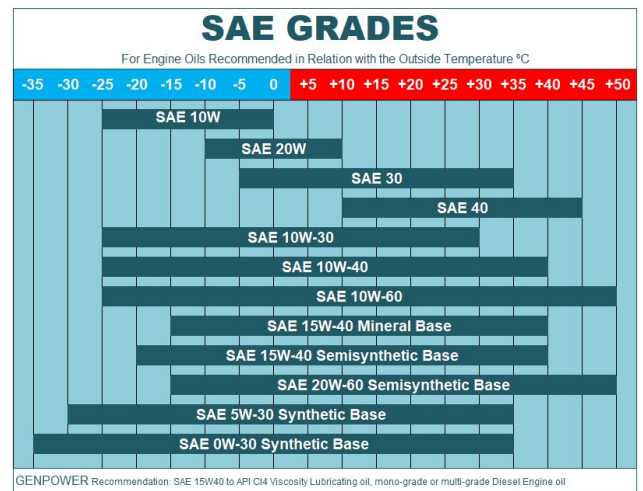

Why You Should Buy GENPOWER?

Only because it is the biggest generator factory in the World? NO!

- * It is one of the most trustworthy and distinguished generator manufacturers in the world with its almost half century experience in the field.
- * It has interiorized the strategy of unconditional customer satisfaction and has been working with this work ethic together with its whole crew.
- * Customers and end users get their moneys' worth and more with every penny.
- * It has become a big family with customers and users who receive durable, long-lasting and high quality products.
- * It has been appreciated many times by customers and suppliers about the investments that have been made for quality enhancement.
- * Both its suppliers and customers always know GENPOWER is and will always be there for them. GENPOWER on their side in bad and good days.
- * In order not to harm brand reputation and recognition, each day, they work harder than the day before.
- * It continues its business only with the suppliers, customers, dealers and technical services that also embrace the same mind set and work ethics.
- * It proves its loyalty for quality and customer satisfaction with its mottos "Your power is the core of our business" and "nothing will be left unfinished"
- * The specifications and/or modifications you can receive with extra costs by other manufacturers are included in standard production in GENPOWER
- * When you purchase GENPOWER products, you are not a customer or a buyer but GENPOWER perceives and accepts you as a valuable member of its continuously growing family.

These are why you should buy from GENPOWER...



Factory Address

ASO II. Industrial Zone
2010 Street No: 18
06909 Temelli-Sincan/Ankara, Turkey
Tel/ Fax: +90(312) 641 32 22 - 641 32 23
genpower@genpower.com.tr
www.genpower.com.tr